





## Freedom Wireless WTX-710 Instruction Sheet

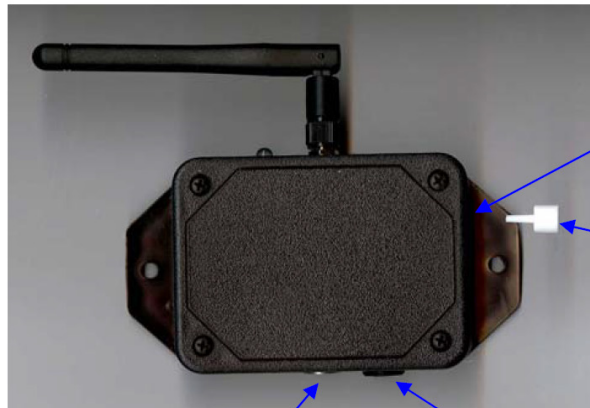

**Pairing switch in the hole**

**Insert tool for pairing**

**Warning : Do not press the switch too hard ; it may damage the tactile switch inside.**



**Front Pin - View**

**Interface Port**

Pin 1 : GND (MIC & PTT)  
Pin 2 : PTT  
Pin 3 : MIC +  
Pin 4 : SPK +  
Pin 5 : SPK -

**Power Supply : 7 ~ 24Vdc**

**Instructions:**

1. Connect WDCCB ( Power cable enclosed) to the power supply jack.
2. Make sure the LED is steady green.
3. Turn on a wireless headset ( WH series), and make sure the performance.  
*(Pairing may be required if the headset is a replacement unit ; The kit package includes the transceiver and headset already paired, so pairing is not required)*
4. Mount the transceiver on open, but covered area for the maximum performance.  
*(Standard unit is not water proof)*

**Pairing Procedure :**

*Pairing is needed only once when the units need to be paired.*

1. Power up the transceiver to an active intercom system and make sure LED is green.
2. Turn the headset off.
3. Use the insert tool supplied or a small screw drive, and push pairing switch for 3 seconds until the LED becomes yellow and starts blinking YEL/GRN alternately.
4. Set a WH series headset in pairing mode. ( see the headset paring manual for details)
5. The headset and transceiver will auto-connect after the pairing is initiated.

